VS-900 Vital Signs Monitor

Quick Guide

Shenzhen Mindray Bio-Medical Electronics Co., Ltd.

Mindray Building, Keji 12th Road South, Hi-tech Industrial Park, Nanshan, Shenzhen 518057 P.R. China

Website: www.mindray.com

Tel. +86 755 81888998

Fax: +86 755 26582680

Contents of this guide are subject to change without prior notice.

The Monitor is intended for monitoring physiologic parameters, including SpO_2, PR, NIBP, TEMP and CO_2, on adult, pediatric, and neonatal patients in healthcare facilities by clinical physicians or appropriate medical staff under the direction of physicians.

WARNING:

The equipment must be connected to a properly installed power outlet with protective earth contacts only. If the installation does not provide for a protective earth conductor, disconnect it from the power line and operate it on battery power, if possible.

mindray

VS-900 Vital Signs Monitor Quick Guide

This is a Quick Guide. Refer to VS-900 Operator's Manual (PN:046-004883-00) for details.

Keys and Functions

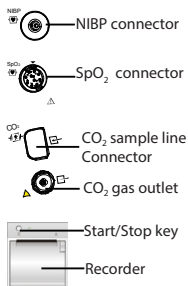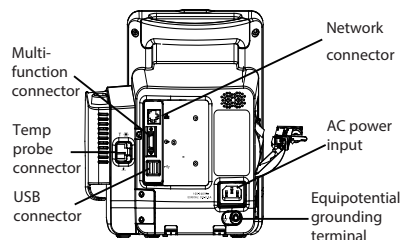|	
⊙/⊙	**Power ON/OFF Switch** ■ Press this key to turn the monitor on. ■ Press this key to enter/exit Standby mode. ■ When the monitor is on, press and hold this key for above 2 seconds to turn the monitor off.
	Alarm Reset Key ■ Press this key to disable the audio of present alarms. ■ Press and hold this key for more than 2 seconds to pause or restore alarms.
	NIBP Start/Stop Key ■ Press to start or stop NIBP measurements.
	Admit Patient Key ■ Press this key to admit a new patient. ■ Press this key to return to main screen.
	Knob ■ Rotate the knob clockwise or anti-clockwise to move the cursor. ■ Press the knob to select one item, such as accessing a menu or confirming the selection.

Interfaces and Menu

Side Connectors and Recorder

- NIBP connector
- SpO_2 connector
- CO_2 sample line Connector
- CO_2 gas outlet
- Start/Stop key
- Recorder

Rear View

- Network connector
- Multi-function connector
- AC power input
- Temp probe connector
- USB connector
- Equipotential grounding terminal

Operating Modes

- Monitor Mode: The monitor will automatically enter monitor mode after powers on. Monitor mode is a common mode for monitoring patient vital signs.
- Spot Check Mode: The spot mode is intended for on-spot measurement in a short period. When spot mode is ON, the message area will display [**Spot Check**] on the top of screen.
  To enter Spot Check mode, select [**Main**]→[**Maintanence>>**]→[**User Settings>>**]→ Enter required password→Set [**Spot Check**] to [**ON**].
- Standby Mode: In standby mode, the monitoring for current patient is over, but the monitor still powers on.
  To enter Standby Mode, press the power button. Then a warning pops up. Select [**Yes**] to enter Standby mode.
- Demo Mode: Demo mode is password protected, and it is used for demonstration purpose only.
  To enter Demo mode, select [**Main**]→[**Maintenance>>**]→[**Demo>>**]→Enter required password→Select [**OK**].